2CORE 12AWG CABLES - CMR, LSZH - UNSHIELDED

PRODUCT NO.: SPR/2350

DESCRIPTION: Available in CMR, LSZH

The KAYBE 2-Core 12AWG Cable delivers reliable performance with excellent signal transmission, featuring CMR, LSZH, and HFFR-rated jacketing for fire safety and low smoke emissions. Its unshielded design ensures flexibility and easy installation while maintaining high-quality performance. Ideal for audio and power applications in residential, commercial, and industrial settings.

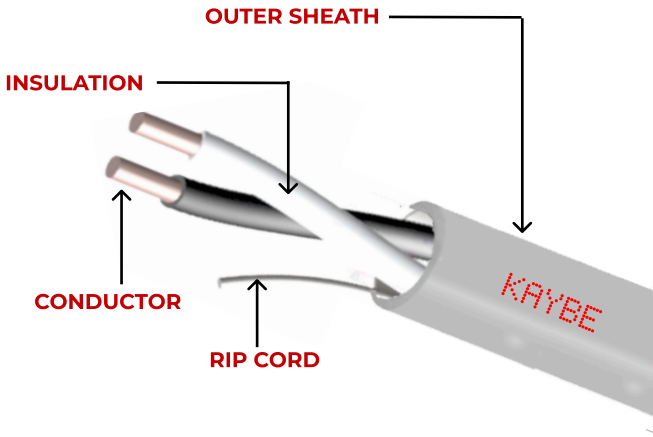

STANDARD REFERENCES

UL Rating	CMR, LSZH
UL Flammability	UL 1666 Vertical Shift
ISO/IEC Flammability	IEC 60332-1
UL Voltage Rating	300V RMS
Certification	CE ROHS certified

PACKAGING

Packaging	305M x 2 Rolls per box Wooden Roll per 305Meters (1000Ft)

CONSTRUCTION DATA SHEET

Item	Audio & Security Cable
CONDUCTOR	
Conductor	2 Cores
Material	Stranded Bare Copper
AWG	12 AWG
Structure	19x25
INSULATION	
Material	PVC
Average Thickness	0.50mm
Diameter	3.0mm
RIP Cord	Yes, Nylon
PE Color	1. Black: RAL9005 2. Red: RAL3000
OUTER JACKET	
Material	LSZH
Average Thickness	> 0.60mm
Diameter	7.70 + 0.2mm
Color	Purple
PRINTING	KAYBE Speaker & Control Cable (SPR/2350) 305M..
LENGTH	305METERS (1000FT)

ELECTRICAL PARAMETERS

Temperature Rating	-20°C To +75°C
Operating Voltage	300V RMS Max.
Dc Resistance	14ohms/1M1 Nom
Capacitance Between conductor to Shield1Khz	60pF/ft Nom.

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	COLOR	WEIGHT
SPR/U2350	2CORES 14AWG, SPEAKER CABLES, CMR PVC, UNSHIELDED	Purple	80kg/km
SPR/LS2350	2CORES 14AWG, SPEAKER CABLES, LSZH, UNSHIELDED	Purple	82kg/km

Copyright © 2024 KAYBE Networking