




3CORES 22AWG, SPEAKER CABLES, CMR PVC, UNSHIELDED

PRODUCT NO.: SPR/3050

DESCRIPTION: Stranded copper cables for BMS & Audio

The KAYBE 3-Core 22AWG Speaker Cable ensures clear and reliable audio transmission, featuring durable CMR PVC jacketing for fire safety. Its unshielded design offers flexibility and ease of installation while maintaining sound quality. Ideal for indoor audio systems in residential and commercial spaces.

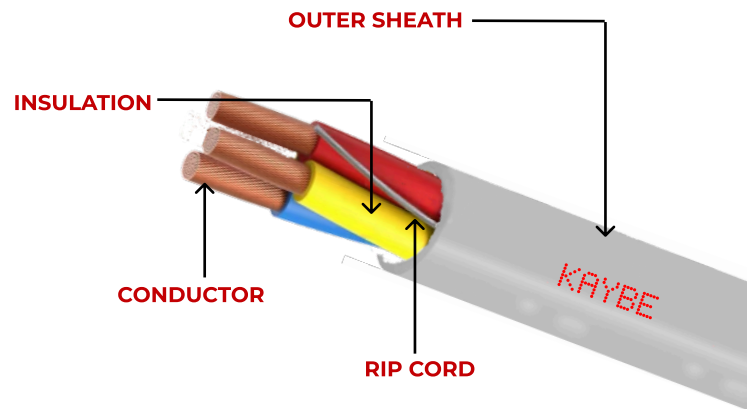

STANDARD REFERENCES

UL Rating	CMR
UL Flammability	UL 1666 Vertical Shift
ISO/IEC Flammability	IEC 60332-1
UL Voltage Rating	300V RMS
Certification	CE ROHS certified

PACKAGING

Packaging	305M Wooden Spool x 2 Drums per box
Weight	5 Kg/roll

CONSTRUCTION DATA SHEET

Item	Audio & Security Cable
CONDUCTOR	
Conductor	3 Cores
Material	Bare Copper
AWG	22 AWG
Structure	7x30 (0.25mm)
INSULATION	
Material	PE
Average Thickness	0.30mm
Diameter	1.3mm + 0.05 mm
RIP Cord	Yes, Nylon
PE Color	1. Black Color 2. Red Color 3. White Color
OUTER JACKET	
Material	CMR, FR-PVC, LSZH
Average Thickness	0.83mm
Diameter	4.5 + 0.2mm
Color	Grey
PRINTING	KAYBE Speaker & Control Cable (SPR/3050) 305M..
LENGTH	305METERS (1000FT)

ELECTRICAL & MECHANICAL PARAMETERS

Tensile Strength N/mm2	10.00 (Min.)
Elongation %	100 (Min.)
Heat Shock 150±20C for 1 hrs.	No Crack
Hot Deformation (75±20C for 4hrs)	50 (Max)
Cold Bend -20± 20C Deg. C for (2~3 Hrs.)	No Crack
Temperature Rating	-20°C To +75°C
Operating Voltage	300V RMS Max.
Dc Resistance	51.2 Ω/km
Capacitance Between conductor to Shield1Khz	125 pF/ft Nom

ORDERING INFORMATION AS PER FOLLOWS

PART NO	DESCRIPTION	COLOR	WEIGHT
SPR/3050	3CORES 22AWG, SPEAKER CABLES, FR PVC, UNSHIELDED	Grey	18kg/km
SPR/LS3050	3CORES 22AWG, SPEAKER CABLES, LSZH, UNSHIELDED	Purple	19.6kg/km
SPR/UL3050	3CORES 22AWG, SPEAKER CABLES, CMR UL, UNSHIELDED	Grey	19.6kg/km